

# SMW O

30-65 HP Ø max. 5 cm [2 inch]

## Mulcher with generous side shift

Agriculture or greenspace maintenance? All easy ...  
– the mulchers of the SMW series mulch grass, prunings and bushes up to 5 cm [2"] in diameter.

The model SMW O is distinguished by an extraordinarily wide side shift to the right. The parallel linkage system allows the machines to work under the trees and close to the crop leaving a much cleaner result.

## Standard version and characteristics

- > Mulches grass and brush up to 5 cm [2"] Ø
- > Working speed 3-10 km/h
- > 3 point rear linkage cat. 1&2
- > Manual parallel linkage side shift P-SHIFT
- > 540 rpm gearbox with freewheel and through shaft
- > Belt transmission
- > Adjustable rear hood with rubber protection
- > Front protection with metal flaps
- > Support roller 152 mm Ø
- > Standard rotor with SMW flails

## Optional configuration and accessories

- > Rotor with Y flails
- > 1000 rpm gearbox
- > Reinforced transmission
- > Hydraulic side shift
- > Hood with rakes
- > Metal front wheels
- > Front protection with chains instead of metal flaps
- > Additional front rubber flap
- > Roller scraper
- > Attachments for undercanopy maintenance (details see separate brochure)



YouTube [www.youtube.com/seppimulcher](http://www.youtube.com/seppimulcher)

## Tools




## Specifications · SMW O

Working width	cm [inch]	<b>135 [53]</b>	<b>145 [57]</b>	<b>155 [61]</b>
Overall width	cm [inch]	147 [58]	157 [62]	167 [66]
Depth	cm [inch]	120 [47]	120 [47]	120 [47]
Height	cm [inch]	95 [37]	95 [37]	95 [37]
Weight (base value)	kg [lb]	410 [900]	430 [940]	445 [980]
Belts	qty	3	3	3
Flails	qty	12	15	15
Y flails	qty	24	27	27
Nominal tractor power	HP	30-65	30-65	30-65

SMWO · features

Robust chassis made of high tensile steel.


S420

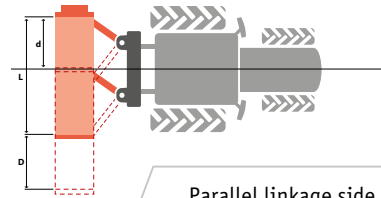


Parallel linkage side shift

L	d	D
135-145	73 cm [29"]	62 cm [24"]
155	82 cm [32"]	62 cm [24"]


**P/Shift**




Rake hood complete with rakes (option)




Adjustable hood to set the degree of mulching  
**M-FLAP**



Adjustable roller, Reinforced bearing and roller  
**4D ROLLER**




Metal front wheels (option)



Standard rotor with SMW flails

Low power consumption at maximum throughput with HELIX ROTOR technology



Optional rotor with Y flails



Tempered counter cutters for a perfect mulching result

