

# S MO pick-up

max. 3-7 cm | 1 - 2.8 inch

50-100 HP

## Manage voluminous pruning with ease

S MO pick-up is used in vineyards, in orchards and olive groves.

This mulcher works rocky and uneven terrains; with the fine mulch grid, the result of the cut material is finely and homogeneously.

You don't need to remove prunings anymore.


When you use a SEPPI pick up mulcher it will be mulched finely, through a fine mulching grid. This results in fast biodegradation, within one season.


## Standard version and characteristics

- > Mulches pruning up to 7 cm [2.8"] Ø
- > Working speed 3-5 km/h
- > ISO 3-point rear linkage  
central fixed cat. 1 and 2  
rear or front mounted and for pushed machines
- > Gearbox 540 rpm  
with automatic inverter and double free-wheel for reversible tractors
- > Belt transmission
- > Rotor driven by tractor hydraulics -  
Required hydr. flow: 20 l/min [5,3 gpm]
- > Pressure gauge and flow control
- > Modular lower pick-up kit for material feed with pick-up rotor and grid
- > Support roller, adjustable in height
- > Rotor with S MO flails
- > 4 rows of replaceable tempered counter cutters

## Optional configuration and accessories

- > PTO drive shaft
- > Gearbox 1000 rpm
- > Front rakes
- > Rubber gauge wheels

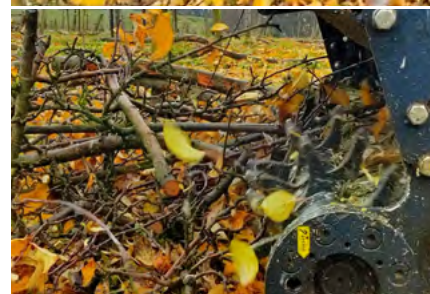

 YouTube [www.youtube.com/seppimulcher](http://www.youtube.com/seppimulcher)

## Specification · S MO pick-up

Working width	cm [inch]	125 [49]	150 [59]	175 [69]	200 [79]
Overall width	cm [inch]	142 [56]	167 [66]	192 [76]	217 [85]
Depth	cm [inch]	126 [50]	126 [50]	126 [50]	126 [50]
Height	cm [inch]	122 [48]	122 [48]	122 [48]	122 [48]
Weight · w/o options	kg [lb]	800 [1,760]	910 [2,000]	1.020 [2,250]	1.130 [2,490]
Belts	qty	4	4	4	4
Fixed hammers	qty	12	15	18	21

## TOOLS



Flails  
S MO

## SMO · Characteristics

Robust chassis made of high tensile steel.

**S420**

