


XSP

Brush cleans trunk and soil.


The **XSP shoot remover** can be mounted either to a mulcher or directly to the tractor, with the 3-point linkage PORT-X.

The brushes of the shoot remover XSP clean the trunk and remove shoots, suckers and grass on the ground.

Features	XSP
Working height	Manual adjustable
Working speed	1-5 km/h
Attachment	Mulcher or PORT-X
Connection	Quick coupling
Flow rate	40 l/min [10 gpm]
Hydraulic inclination	for maneuvering and compact transport
Absorber	Bumper and touch spring
Protecting	Hood against gravel impact
Brush	Fiber brushes

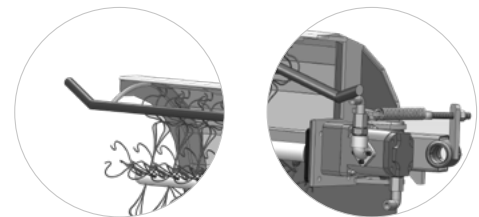

Adjustable bumper and touch spring
Nylon fibers may be replaced quickly

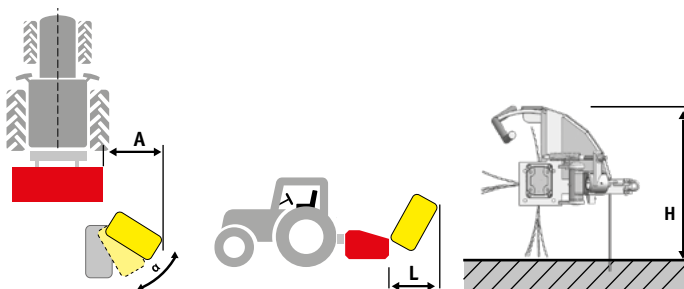

working angle $\alpha = ^\circ$	working width A: cm ["]	length of the equipment ready for transport L: cm	height H: cm	weight* kg [lb]
20	25 [10]	80 [31]	50 [20]	40 [88]

* The weight of the machine is approximate and may vary.

Season	- spring - summer - autumn
Ideal Situation	- from ca. 2 cm [0.8"] diameter - grass up to 1 cm [0.4"] Ø and up to 50 cm [20"] - dry soil - slight slope up to ca. 10°
Advantages	- high driven speed possible - no minimum distance between plants required

