

MINIFORST cl

200-350 bar | 90-190 l/min

Compact & powerful for compact loaders

This forestry mulcher for skid steers and compact track loaders is suitable for forestry work as well as the most demanding applications in landscaping and maintaining areas in which prunings, stumps and wood must be mulched to fine size.

Mounted on a compact loader, they reach hard-to-access areas with great ease.

Standard version and specifications

- > Mulches wood up to 20 cm [8"] Ø
- > Working speed 0-5 km/h
- > Chassis made of high tensile steel S420
- > SAE skid steer attachment interface
- > 5 belt transmission
- > Pressure gauge
- > Hydraulically operated hood
- > Rear chain protection
- > Reinforced support skids, adjustable in height
- > Rotor with tungsten CARBIDE inserts hammers MINI DUO; anti-wear hammer support
- > 5 rows of tempered COUNTER CUTTERS (3 chassis, 2 hood)

Optional configuration and accessories

- > CUT CONTROL rotor with MINI DUO
- > CUT CONTROL rotor with MINI BLADE
- > Electric valve for hood control with controls
- > Without hood
- > Guard frame
- > Variable displacement motor with relief valve
- > 1/2" polycarbonate impact resistant shield for loader. Replaces original glass shield. Excluding installation.






[YouTube www.youtube.com/seppimulcher](https://www.youtube.com/seppimulcher)

Fields of application

- > Vegetation management in forestry
- > Right of way ROW and roadside maintenance
- > Land clearing and reclamation
- > Site preparation
- > Maintaining of power and communication lines

| Specifications - MINIFORST cl | | | | |
|---------------------------------|-----------|---------------|---------------|---------------|
| Working width | cm [inch] | 150 [59] | 175 [69] | 200 [79] |
| Overall width | cm [inch] | 175 [69] | 200 [79] | 225 [89] |
| Depth | cm [inch] | 99 [39] | 99 [39] | 99 [39] |
| Height | cm [inch] | 86 [34] | 86 [34] | 86 [34] |
| Weight · base value w/o options | kg [lb] | 1.055 [2,326] | 1.140 [2,513] | 1.265 [2,789] |
| Hammers | qty | 30 | 33 | 36 |

Tools

| | |
|---|--------------------------|
|  | MINI-DUO |
|  | MINI-DUO + CUT CONTROL |
|  | MINI BLADE + CUT CONTROL |

M-BOOST

High-performance hydraulic drive

The powerful transmission of the **MINIFORST cl** is compatible with hydraulic systems with flow rates of 90 to 190 l/min and is available with different types of hydraulic motors. The most powerful and efficient motor, the M-BOOST motor, delivers 40% more torque than standard motors.


Your SEPPI M. dealer will help you choose the optimum motor for your application.

HYDRAULIC DRIVE

| | |
|--------------------------|--------------------------------|
| Pressure | 200-350 bar [3,000-5,000 psi] |
| Required hydraulic flow | 90-190 l/min [24-50 gpm] |
| Required hydraulic hoses | 3 (pressure, return, drainage) |
| Case drain pressure | max. 1.5 bar |

REQUIRED HYDRAULIC FITTINGS

| | |
|----------------|--|
| Hydraulic hood | 1 double acting (or OPT-158: electric valve for hood control with controls) |
|----------------|--|

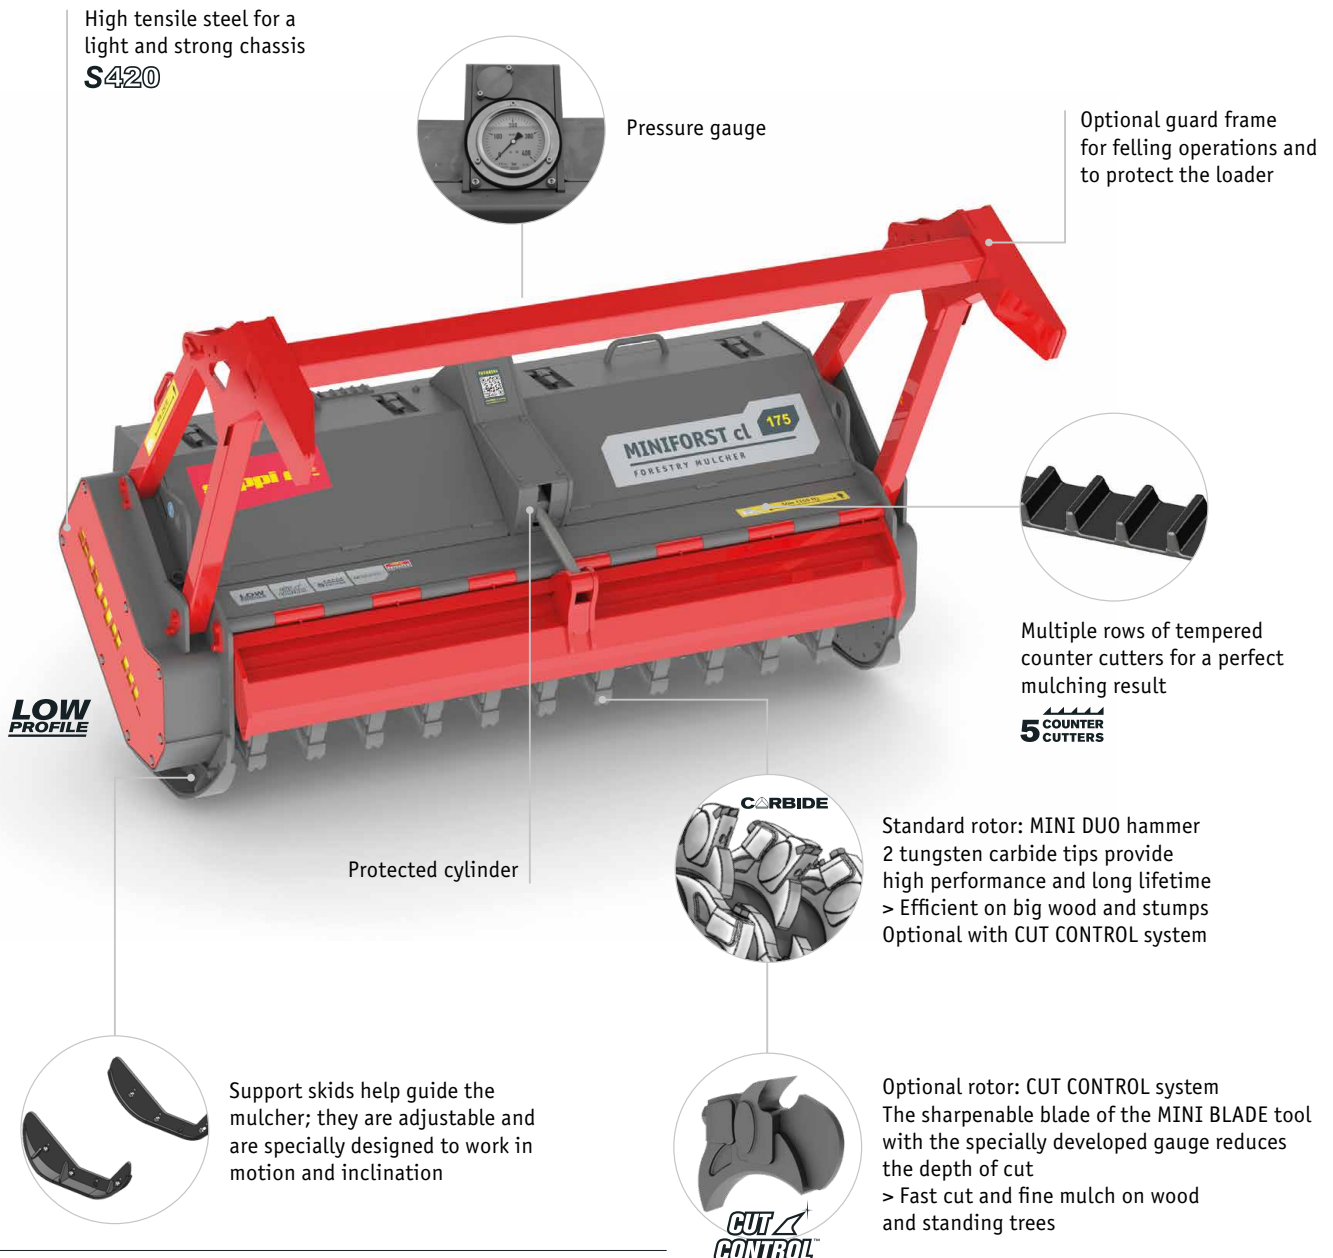

Safety Note: MINIFORST cl may be raised to a maximum of 50 cm [20"] and must only be used with an impact-resistant windshield (polycarbonate minimum thickness 1/2").